Quick Installation Guide

Dual Monitor Stand

* Monitors are not included

Dual Monitor Stand

DS-219STA

STEP 1 Box Contents

DUAL STAND
1Set

VESA BRACKET
2EA

M4-10 BOLT
10EA

4MM WRENCH
1EA

CABLE TIE
6 EA

CABLE VELCRO
2 EA

※ Check if all parts are included in the package.
※ Contact your sales representative if parts are missing.
※ Actual components may look different from the pictures above.

STEP 2 Specification

Application Notes

Weight Capacity : 22*lbs* per monitor (Max)
Maximum LCD Width : 18.0″ per monitor (Max)

VESA

75mm X 75mm
100mm X 100mm

www.doublesight.com

DoubleSight Displays
18 Technology Dr., #161
Irvine, CA 92618 U.S.A.
TEL: 1-877-TwoLCDs(1-877-896-5237) (U.S. only)
E-mail: sales@doublesight.com

DoubleSight™ DISPLAYS

Quick Installation Guide

STEP 3 Installation

1. Attach VESA Bracket to each monitor

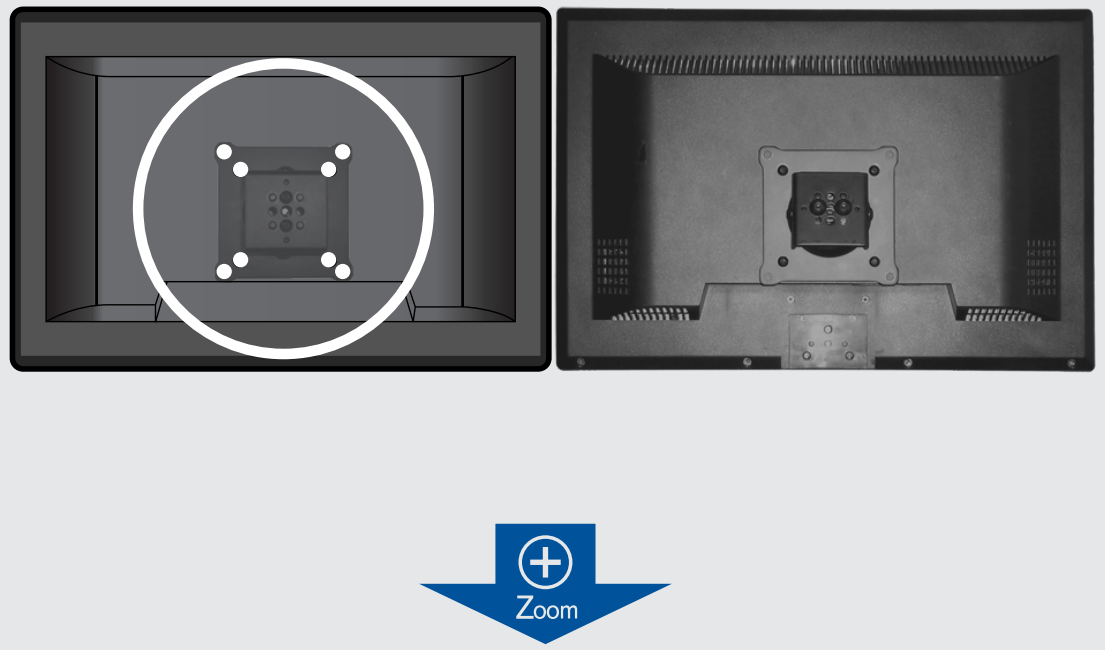

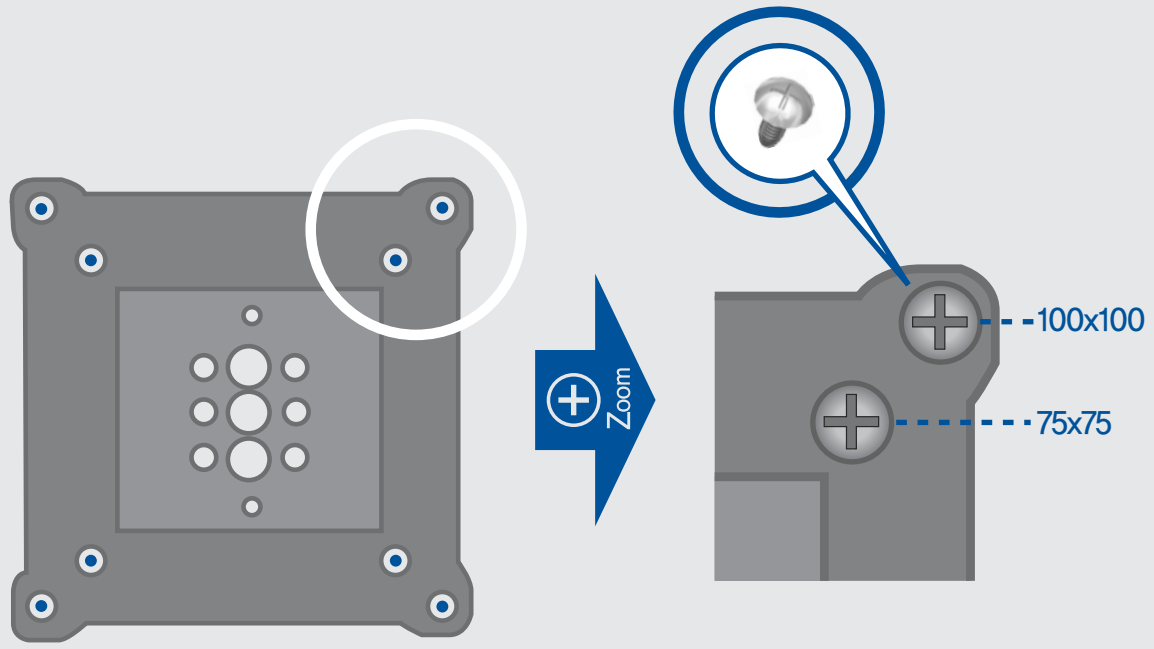

※ Screw VESA Bracket onto Monitors in line with back side holes using the provided M4-10 bolts (4 bolts per bracket).

2. Join Monitor to the Stand.

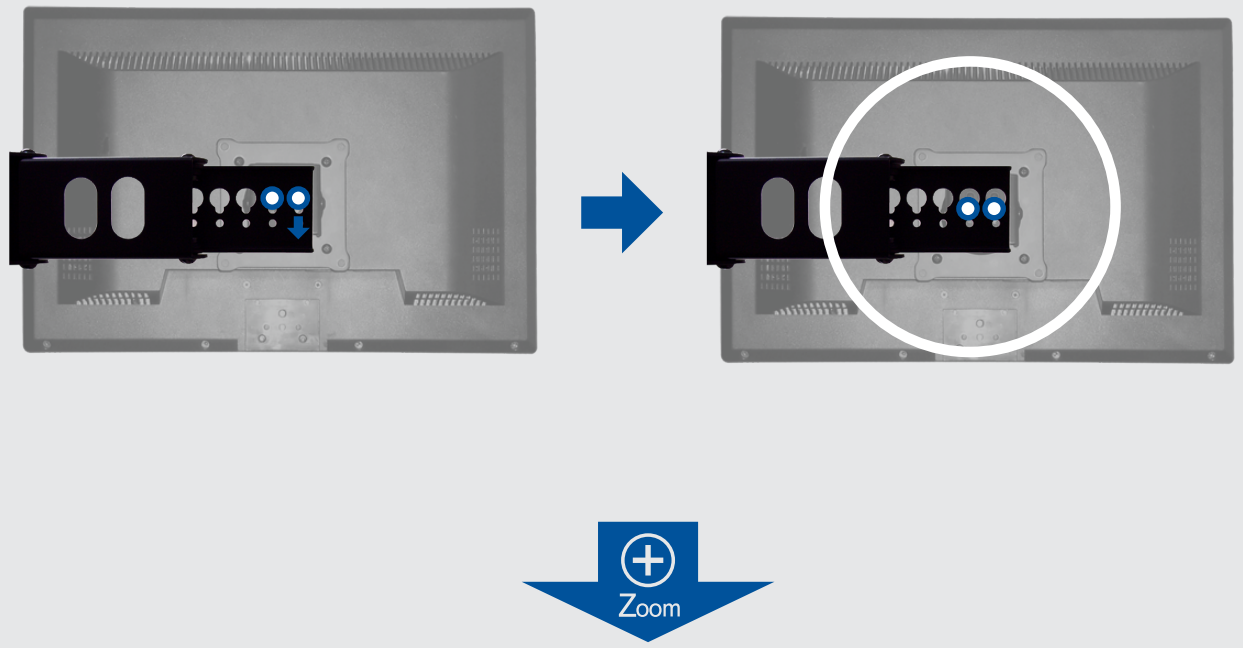

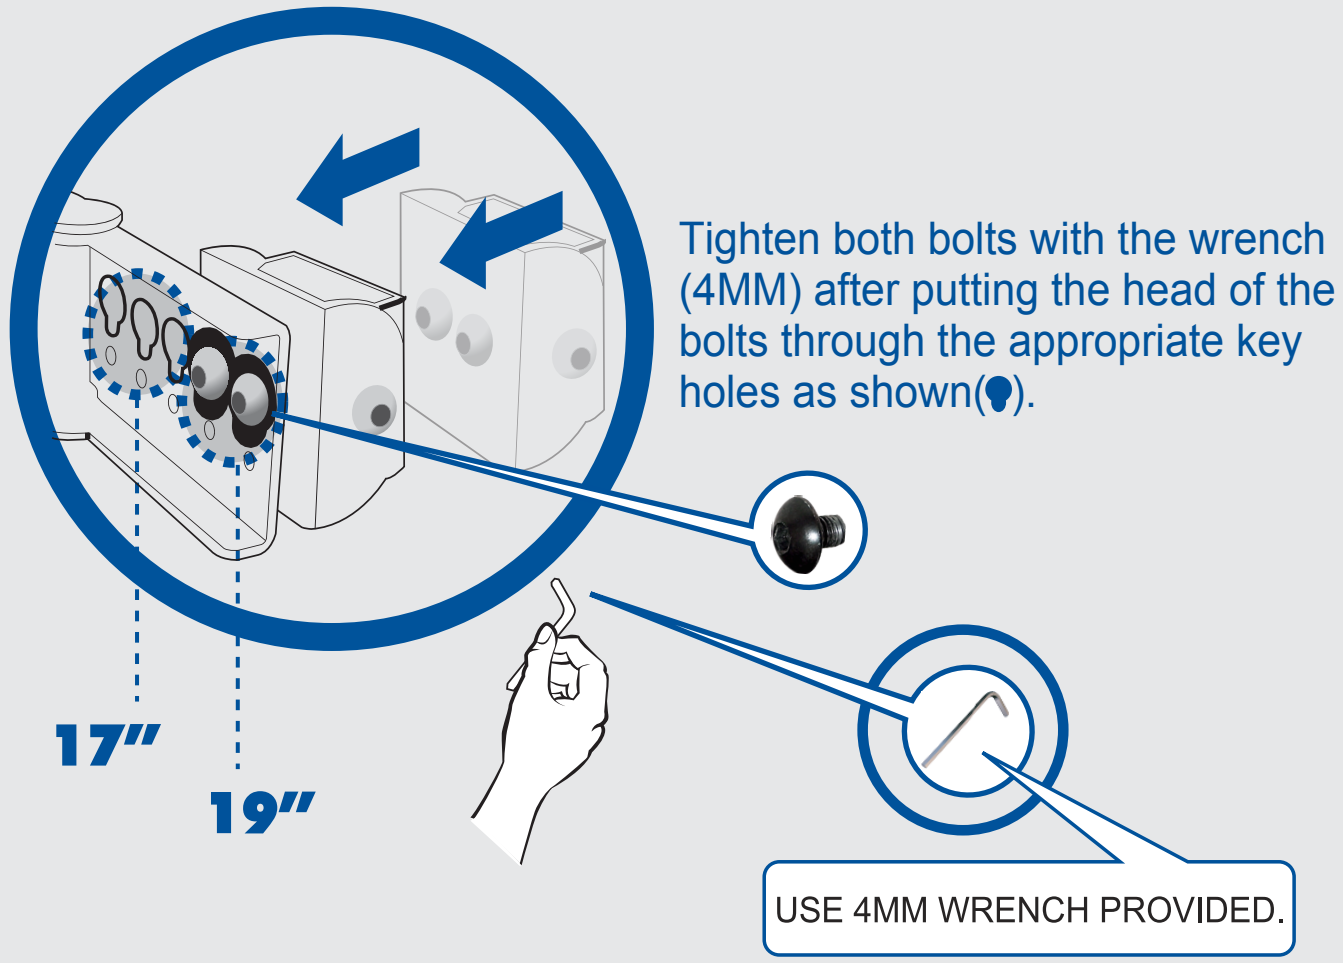

Tighten both bolts with the wrench (4MM) after putting the head of the bolts through the appropriate key holes as shown(●).

※ Safety Note - Please hold or secure stand while installing monitors as stand may be unstable during assembly.

3. Set Monitor View Angles

You can now adjust the monitors to your preferred viewing angle.

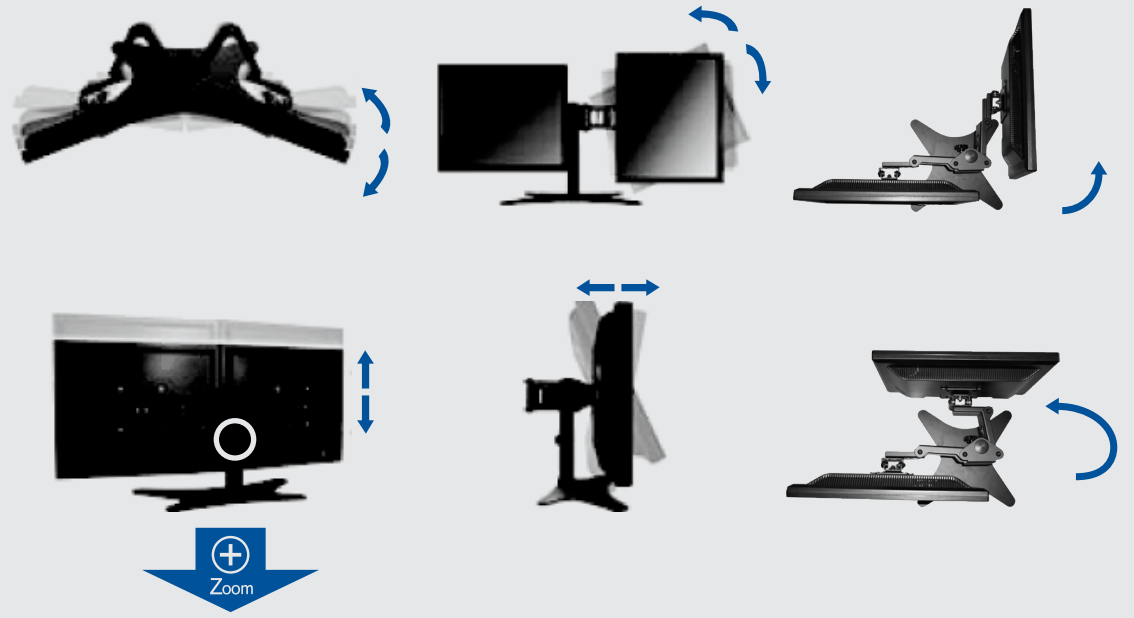

When adjusting the height, please loosen the handle, set the proper hight and tighten the handle.

※ Note – left monitor moves in forward angles only.
※ Safety Note – do not force monitors into position as this may damage panels.

4. Cable Management

Use the provided cable ties and velcro strapping to organize video and power cables.